

<b>SANYO</b>	No.2527A	<b>2SA1475/2SC3781</b>
		PNP/NPN Epitaxial Planar Silicon Transistors Very High-Definition CRT Display Video Output Applications

**Applications**

- . Video output
- . Color TV chroma output
- . Wide-band amp

**Features**

- . High  $f_T$  ( $f_T$  typ=500MHz)
- . High breakdown voltage ( $V_{CEO} \geq 120V$ )
- . Small reverse transfer capacitance and excellent HF response ( $c_{re}=2.6pF$ (NPN),  $3.9pF$ (PNP))
- . Complementary PNP and NPN types
- . Adoption of FBET process

( ): 2SA1475

**Absolute Maximum Ratings at Ta=25°C**

Collector-to-Base Voltage	$V_{CBO}$	(-)120	V
Collector-to-Emitter Voltage	$V_{CEO}$	(-)120	V
Emitter-to-Base Voltage	$V_{EBO}$	(-)4	V
Collector Current	$I_C$	(-)400	mA
Peak Collector Current	$i_{cp}$	(-)600	mA
Collector Dissipation	$P_C$	1.5	W
		15	W
Junction Temperature	$T_j$	150	°C
Storage Temperature	$T_{stg}$	-55 to 150	°C

$T_c=50^\circ C$

**Electrical Characteristics at Ta=25°C**

			min	typ	max	unit
Collector Cutoff Current	$I_{CBO}$	$V_{CB}=(-)80V, I_E=0$		(-)0.1		$\mu A$
Emitter Cutoff Current	$I_{EBO}$	$V_{EB}=(-)2V, I_C=0$		(-)1.0		$\mu A$
DC Current Gain	$h_{FE}(1)$	$V_{CE}=(-)10V, I_C=(-)50mA$	40		320*	
	$h_{FE}(2)$	$V_{CE}=(-)10V, I_C=(-)250mA$	20			
Gain-Bandwidth Product	$f_T$	$V_{CE}=(-)10V, I_C=(-)50mA$		500		MHz
Collector to Emitter Saturation Voltage	$V_{CE(sat)}$	$I_C=(-)70mA, I_B=(-)7mA$			0.6 (-0.8)	V


Continued on next page.

\*:The 2SA1475/2SC3781 are classified by 50mA  $h_{FE}$  as follows:

40	C	80	60	D	120
100	E	200	160	F	320







**Package Dimensions 2010A**

(unit: mm)








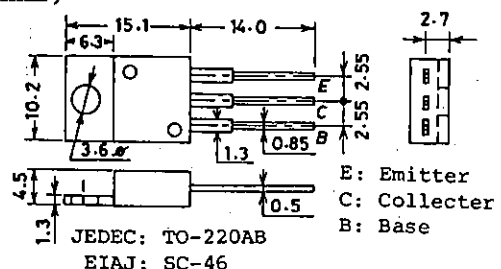


Continued from preceding page.



			min	typ	max	unit
Base to Emitter Saturation Voltage	$V_{BE(sat)}$	$I_C=(-)70mA, I_B=(-)7mA$			(-)1.0	V
Collector-to-Base Breakdown Voltage	$V_{(BR)CBO}$	$I_C=(-)10\mu A, I_E=0$	(-)	120		V
Collector-to-Emitter Breakdown Voltage	$V_{(BR)CEO}$	$I_C=(-)1mA, R_{BE}=\infty$	(-)	120		V
Emitter-to-Base Breakdown Voltage	$V_{(BR)EBO}$	$I_E=(-)100\mu A, I_C=0$	(-)	4		V
Output Capacitance	$c_{ob}$	$V_{CB}(-)30V, f=1MHz$		3.0(4.4)		pF
Reverse Transfer Capacitance	$c_{re}$	$V_{CB}(-)30V, f=1MHz$		2.6(3.9)		pF

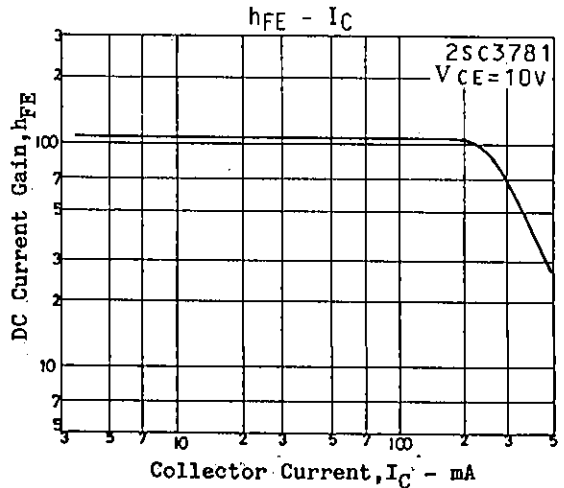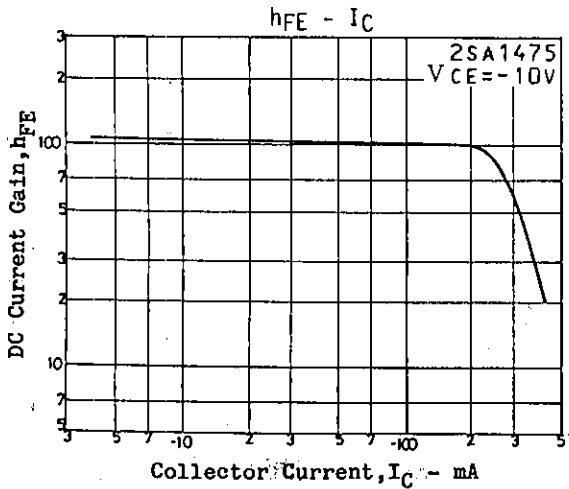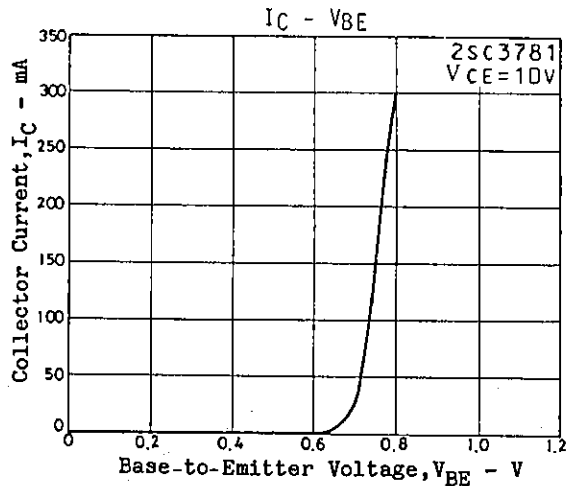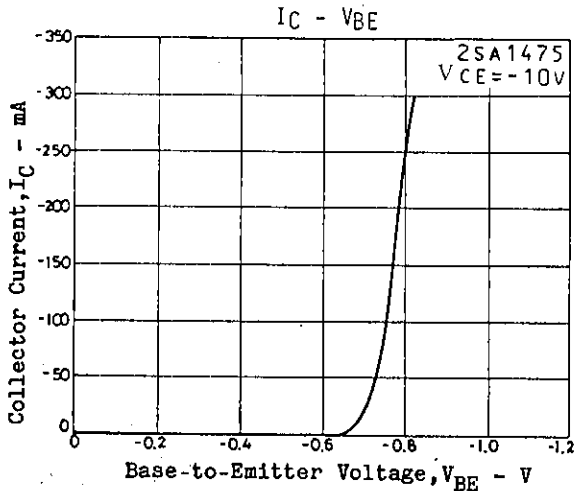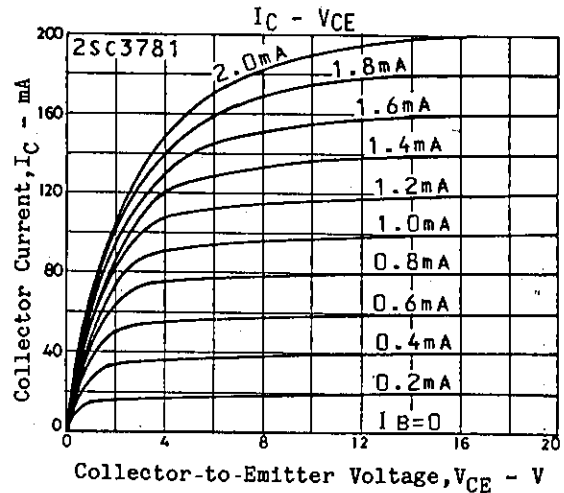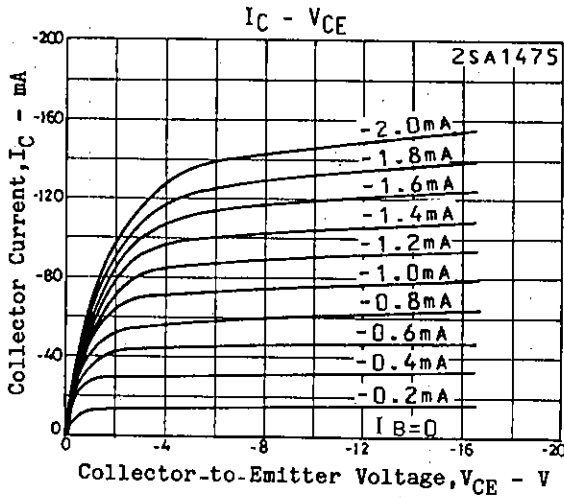

2SA1475/2SC3781

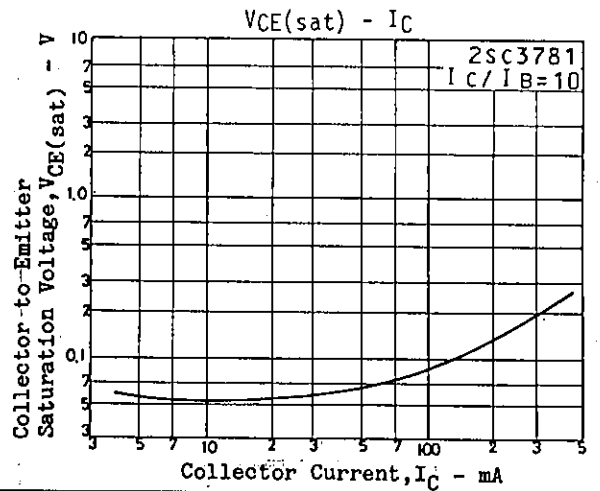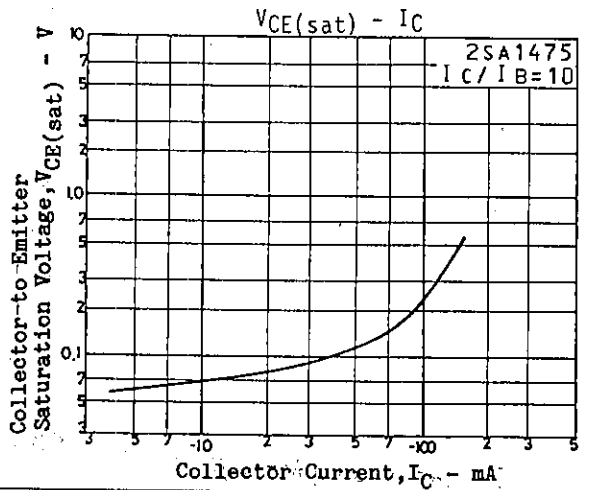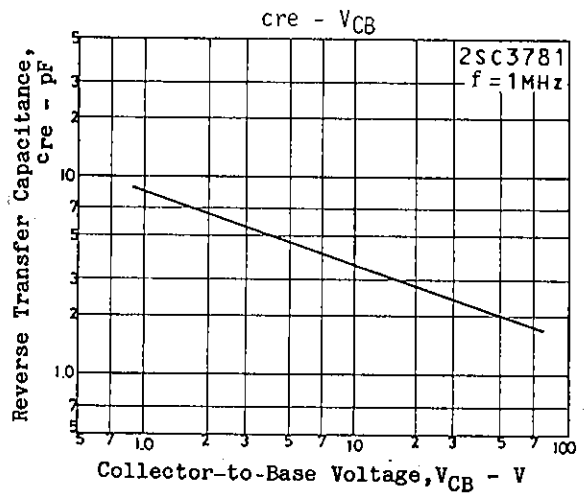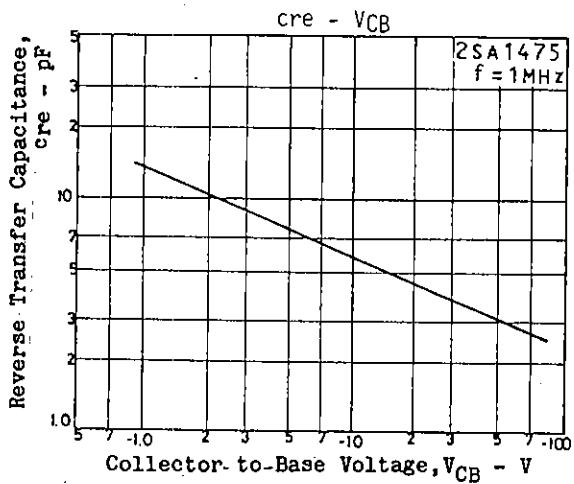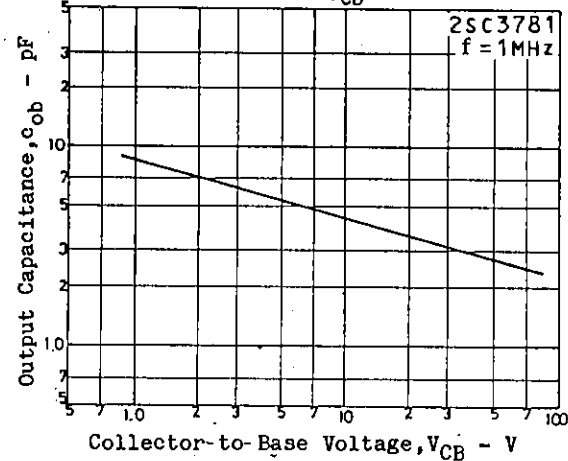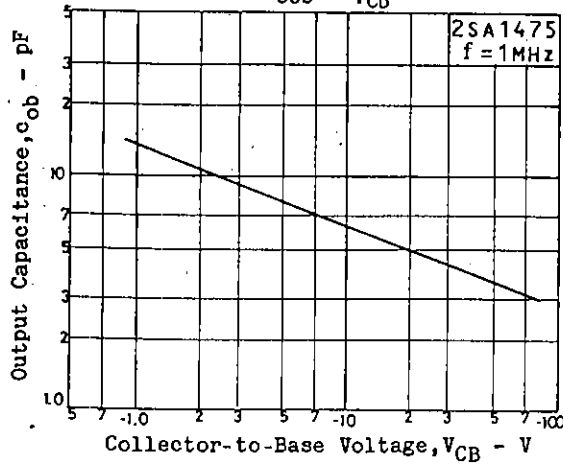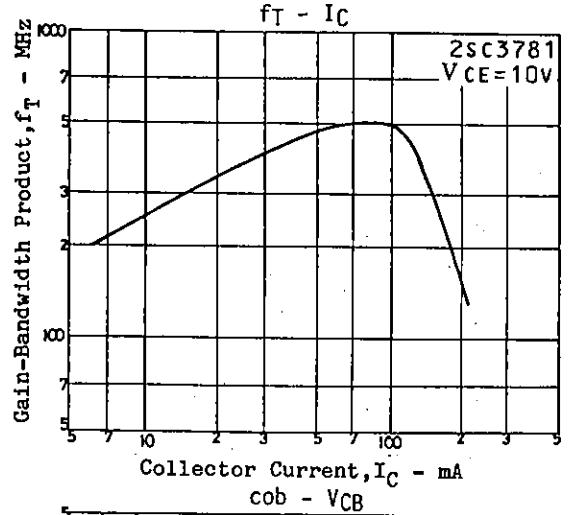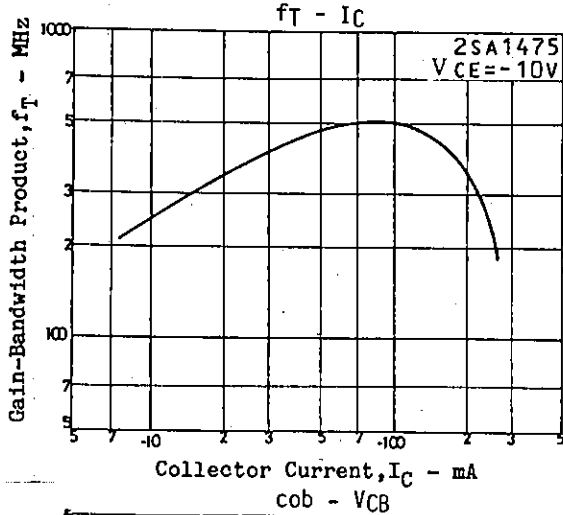

2SA1475/2SC3781

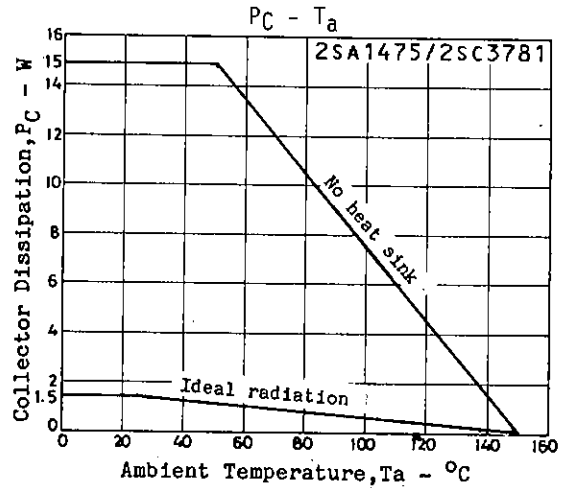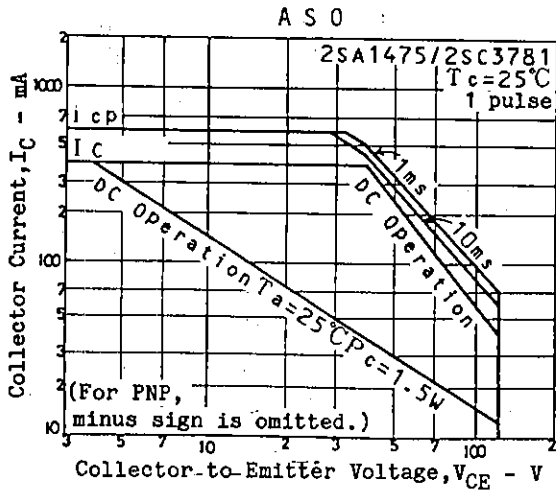

- No products described or contained herein are intended for use in surgical implants, life-support systems, aerospace equipment, nuclear power control systems, vehicles, disaster/crime-prevention equipment and the like, the failure of which may directly or indirectly cause injury, death or property loss.
- Anyone purchasing any products described or contained herein for an above-mentioned use shall:
  - ① Accept full responsibility and indemnify and defend SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors and all their officers and employees, jointly and severally, against any and all claims and litigation and all damages, cost and expenses associated with such use.
  - ② Not impose any responsibility for any fault or negligence which may be cited in any such claim or litigation on SANYO ELECTRIC CO., LTD., its affiliates, subsidiaries and distributors or any of their officers and employees jointly or severally.
- Information (including circuit diagrams and circuit parameters) herein is for example only; it is not guaranteed for volume production. SANYO believes information herein is accurate and reliable, but no guarantees are made or implied regarding its use or any infringements of intellectual property rights or other rights of third parties.